





БЛОК ХОДОВИ КОЛЕЛА WHEEL BLOCKS

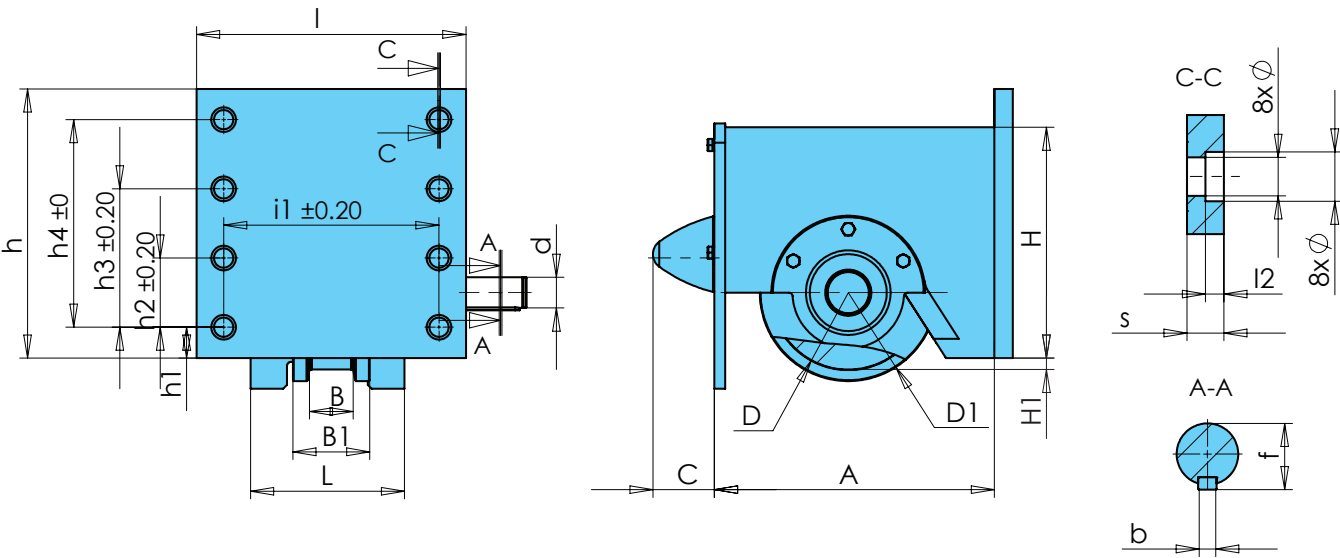

Означение Type	D	D1	D2	B	B1	A	L	L1	H	H1	C	d	b	t	Rdop. [kg]	Ел.гвѹзателѹ Motors	Регѹкморѹ Reducers
	[mm]																
BG125	125	150	60	50	80	264	150	97	250	7,5	80	30	8	33	3640	AK7-4; 6; 8/2	TP1160
BG160	160	190	60	60	90	289	150	97	250	15	80	30	8	33	5510	AK80 ; AK80P	TP1160
BG200	200	230	60	60	100	364	200	106	300	15	80	35	10	38	8520	AK90 ; AK80P	TP1200
BG200	200	230	60	60	100	364	200	118	300	15	80	40	12	43	8520	AK90 ; AK80P	TP1250
BG250	250	280	60	60	100	364	200	118	300	15	80	40	12	43	10800	AK90P ; AK80P	TP1250
BG315	315	350	65	80	120	464	200	142	400	15	80	50	14	53.5	13680	AK90P ; AK100	TP1315
BG315*	315	350	65	90	120	464	200	142	400	15	80	50	14	53.5	13680	AK90P ; AK100	TP1315
BG400	400	450	95	80	130	514	250	142	450	20	80	50	14	53.5	19800	AK100 ; AK100P	TP1315
BG400*	400	450	95	90	130	514	250	142	450	20	80	50	14	53.5	19800	AK100 ; AK100P	TP1315
BG400**	400	450	95	100	130	514	250	142	450	20	80	50	14	53.5	19800	AK100 ; AK100P	TP1315

Означеніе Type	l	l1	l2	s	h	h1	h2	h3	h4	Ø	d1
	[mm]										
BG125	300	230	12	20	300	30	80	160	240	25	32
BG160	300	230	12	24	300	30	80	160	240	25	32
BG200	350	280	12	24	350	40	90	180	270	25	32
BG250	350	280	12	24	350	40	90	180	270	25	32
BG315	350	280	12	30	450	60	110	220	330	28	35
BG315*	350	280	12	30	450	60	110	220	330	28	35
BG400	400	330	12	30	500	70	120	240	360	31	38
BG400*	400	330	12	30	500	70	120	240	360	31	38
BG400**	400	330	12	30	500	70	120	240	360	31	38

БЛОК ХОДОВИ КОЛЕЛА ВЗРИВОЗАЩИТНИ **EXPLOSION-PROOF WHEEL BLOCKS**

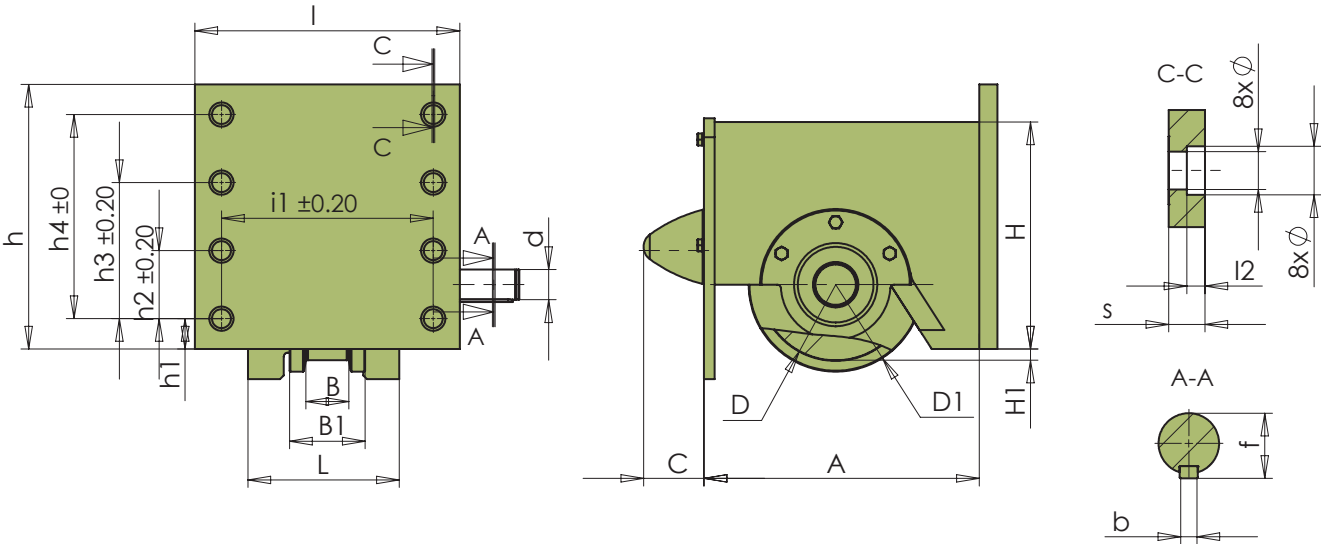

Означение Type	D	D1	D2	B	B1	A	L	L1	H	H1	C	d	b	t	Rdop. [kg]	Ел.гвизателу Motors	Регуктору Reducers
	[mm]																
BG125	125	150	60	50	80	264	150	97	250	7,5	80	30	8	33	3640	AKK1305-12/4Ex	TP1160
BG160	160	190	60	60	90	289	150	97	250	15	80	30	8	33	5510	AKK1608B12/4Ex	TP1160
BG200	200	230	60	60	100	364	200	106	300	15	80	35	10	38	8520	AKK1608P6Ex	TP1200
BG200	200	230	60	60	100	364	200	118	300	15	80	40	12	43	8520	AKK1608P6Ex	TP1250
BG250	250	280	60	60	100	364	200	118	300	15	80	40	12	43	10800	AKK1608-6Ex	TP1250
BG315	315	350	65	80	120	464	200	142	400	15	80	50	14	53.5	13680	AKK1605-4Ex	TP1315
BG315*	315	350	65	90	120	464	200	142	400	15	80	50	14	53.5	13680	AKK1608-4Ex	TP1315
BG400	400	450	95	80	130	514	250	142	450	20	80	50	14	53.5	19800	AKII1608-6Ex	TP1315
BG400*	400	450	95	90	130	514	250	142	450	20	80	50	14	53.5	19800	AKII1608-6Ex	TP1315
BG400**	400	450	95	100	130	514	250	142	450	20	80	50	14	53.5	19800	AKII1608-6Ex	TP1315

Означение Type	l	l1	l2	s	h	h1	h2	h3	h4	Ø	d1
	[mm]										
BG125	300	230	12	20	300	30	80	160	240	25	32
BG160	300	230	12	24	300	30	80	160	240	25	32
BG200	350	280	12	24	350	40	90	180	270	25	32
BG250	350	280	12	24	350	40	90	180	270	25	32
BG315	350	280	12	30	450	60	110	220	330	28	35
BG315*	350	280	12	30	450	60	110	220	330	28	35
BG400	400	330	12	30	500	70	120	240	360	31	38
BG400*	400	330	12	30	500	70	120	240	360	31	38
BG400**	400	330	12	30	500	70	120	240	360	31	38