



CVAT 2/1

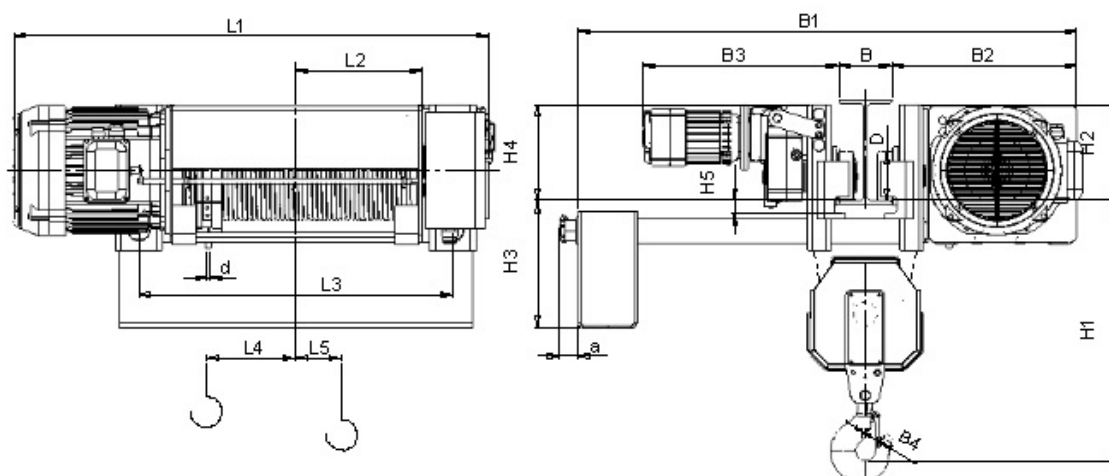

a=2/1			Capacity Tragfähigkeit [kg]	Dimension / Masse [mm]																				
TYPE / TYP	Lifting height Hubhöhe [m]			Lifting speed Hubgeschwindigkeit [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1	H2	H3	H4	H5	D	a	d
				8	12	8/2	12/2																	
				5*	8*	5/1,2*	8/1,2*																	
				L1																				
CVAT10 CVATB10*	H1	6,5	824	824	861	861	186	484	78	48	110...300	1021	369	487	34	510	245	300	245	30	100	48	8	
	H2	9	934	934	971	971	241	594	133															
	H3	12	1044	1044	1081	1081	296	704	188															
	H4	18	1264	1264	1301	1301	406	924	298															
	H5	24	1484	1484	1521	1521	516	1144	408															
CVAT20 CVATB20*	H1	8,5	955	955	1004	1004	219	595	82	54	120...300	1278	475	504	40	600	247,5	327,5	247,5	33	125	48	10	
	H2	11,5	1055	1055	1104	1104	269	695	132															
	H3	15	1165	1165	1214	1214	324	805	187															
	H4	22	1385	1385	1434	1434	434	1025	297															
	H5	29	1605	1605	1654	1654	544	1245	407															
CVAT30 CVATB30*	H1	7,5	969	998	1036	1036	219	595	82	54	120...300	1278	475	504	45	675	247,5	327,5	247,5	33	125	48	12	
	H2	10	1069	1098	1136	1136	269	695	132															
	H3	13	1179	1208	1246	1246	324	805	187															
	H4	19	1399	1428	1466	1466	434	1025	297															
	H5	25	1619	1648	1686	1686	544	1245	407															
CVAT40 CVATB40*	H1	6,5	1070	1096	1151	1151	219	623	89	48	130...300	1408	611	537	50	870	260	350	260	33	150	58	14	
	H2	9,5	1165	1191	1246	1246	266	718	137															
	H3	12,5	1257	1283	1338	1338	312	810	183															
	H4	18,5	1503	1529	1584	1584	436	1056	306															
	H5	25,5	1749	1775	1830	1830	558	1302	429															
CVAT50	H2	9	1346	1346	1346	1346	275	765	138	44	130...300	1705	713	540	71	1082	280	465	283	43	190	70	18	
	H3	12	1446	1446	1446	1446	325	865	188															
	H4	18	1646	1646	1646	1646	425	1065	288															
	H5	24	1846	1846	1846	1846	525	1265	388															
	CVAT60*	H2	9	1375	1375	1375	1375	296	745															128
H3		15	1570	1570	1570	1570	394	940	225															
H4		18	1670	1670	1670	1670	444	1040	275															
H5		25	1880	1880	1880	1880	549	1250	380															

* - Ausführung mit einer Vorrichtung 'B' / Executions with reduction gear 'B'.


CVAT 4/1

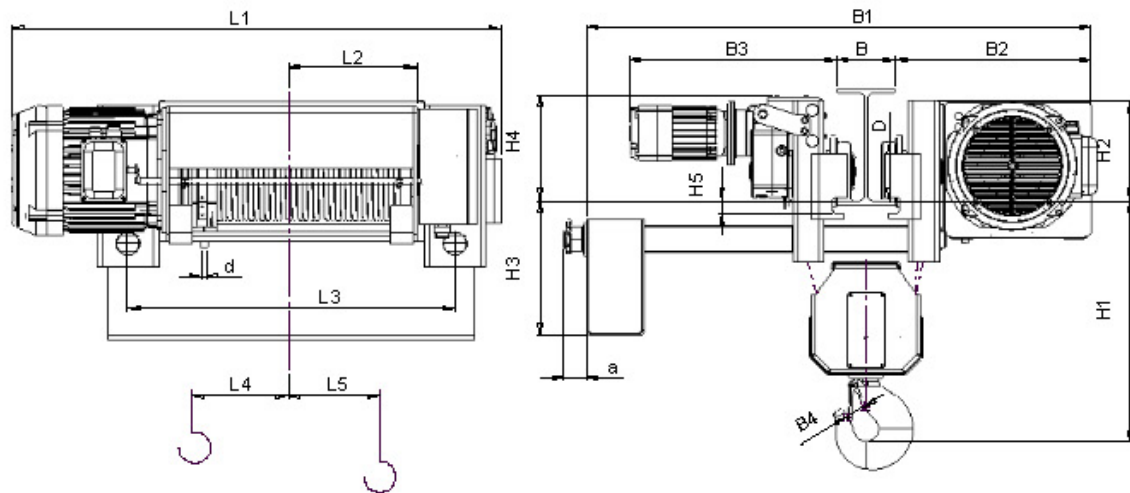

a = 4/1			Capacity [kg] Tragfähigkeit	Dimension / Masse [mm]																				
TYPE / TYP	Lifting height Hubhöhe[m]	Lifting speed Hubgeschwindigkeit [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1	H2	H3	H4	H5	D	a	d		
		4		6	4/1																		6/1	
		2,5*		4*	2,5/0,6*																		4/0,6*	
		L1																						
CVAT05 CVATB05*	H1	8,5	1 000	915	915	952	952	296	704	123	-5	110...300	1030	378	487	34	455	245	300	255	30	100	48	6
	H2	12,5		1135	1135	1172	1172	406	924	233	-60													
	H3	16,5		1355	1355	1392	1392	516	1144	343	-80													
CVAT10 CVATB10*	H1	6	2 000	1053	1053	1090	1090	296	744	123	-5	130...300	1196	393	504	45	501	247,5	277,5	253	32,5	125	48	8
	H2	9		1273	1273	1310	1310	406	964	233	-60													
	H3	12		1493	1493	1530	1530	516	1184	343	-80													
CVAT20 CVATB20*	H1	7,5	4 000 5 000*	1212	1212	1261	1261	324	845	139	-19	130...300	1306	508	537	50	580	260	350	273,5	33	150	58	10
	H2	11		1432	1432	1481	1481	434	1065	249	-74													
	H3	14,5		1652	1652	1701	1701	544	1285	359	-129													
CVAT30 CVATB30*	H1	6,5	6 300	1226	1255	1293	1293	324	845	84	38	130...300	1306	508	537	56	635	260	350	273,5	33	150	58	12
	H2	9,5		1446	1475	1513	1513	434	1065	194	-18													
	H3	12,5		1666	1695	1733	1733	544	1285	304	-72													
CVAT40 CVATB40*	H1	6	10 000	1322	1348	1378	1378	312	850	70	45	130...300	1513	620	539	71	850	280	380	295,5	43	190	70	14
	H2	9		1568	1594	1624	1624	435	1096	193	-16													
	H3	12,5		1814	1840	1870	1870	558	1342	316	-78													
CVAT50	H1	6	16 000	1454	1454	1454	1454	330	865	8	109	170...300	1705	713	633	90	1030	425	435	434,5	55	250	70	18
	H2	9		1654	1654	1654	1654	430	1065	108	58													
	H3	12		1854	1854	1854	1854	530	1265	208	8													
CVAT A 60*	H1	7,5	16 000	1560	1560	1560	1560	394	940	54	83	170...300	1770	778	633	90	1030	425	435	434,5	55	250	70	18
	H2	9		1660	1660	1660	1660	444	1040	104	58													
	H3	12,5		1870	1870	1870	1870	549	1250	209	5													

* - Ausführung mit einer Vorrichtung / Executions with reduction gear "B":

CVAT 4x2

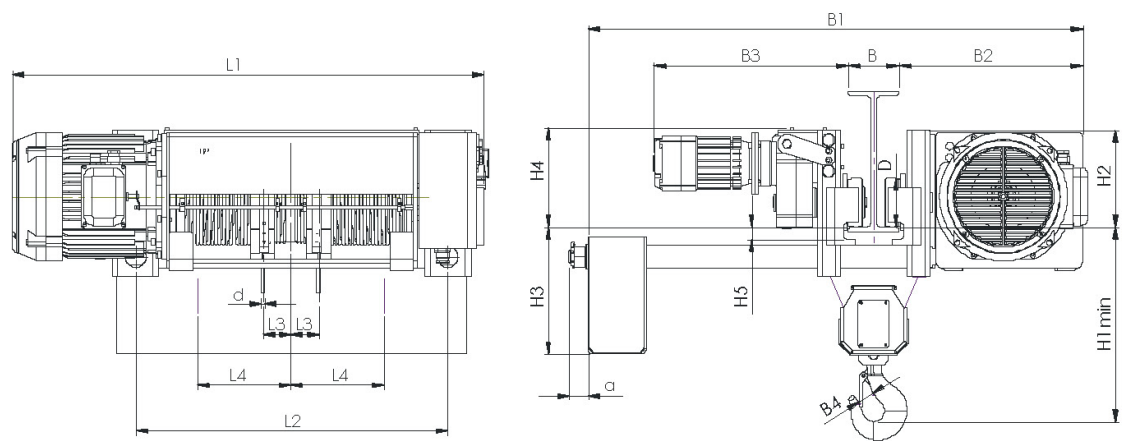

a = 4/2			Capacity [kg] Tragfähigkeit	Dimension / Masse [mm]																			
TYPE / TYP	Lifting height Hubhöhe [m]			Lifting speed Hubgeschwindigkeit [m/min]				L2	L3	L4	B	B1	B2	B3	B4	H1	H2	H3	H4	H5	D	a	d
				8 5*	12 8*	8/2 5/1,2*	12/2 8/1,2*																
				L1																			
CVAT20 CVATB20*	H1	6,5	2 000	1165	1165	1214	1214	805	65	240	130...300	1278	475	504	45	501	247,5	327,5	254,5	32,5	125	48	8
	H2	11		1385	1385	1434	1434	1025		350													
	H3	15,5		1605	1605	1654	1654	1245		460													
	H4	20		1825	1825	1874	1874	1465		570													
CVAT30 CVATB30*	H1	4,5	3200	1212	1241	1261	1261	845	90	240	130...300	1306	508	537	50	580	260	350	276	33	150	58	10
	H2	8		1432	1461	1481	1481	1065		350													
	H3	11,5		1652	1681	1701	1701	1285		460													
CVAT40 CVATB40*	H1	6,5	5000	1503	1529	1584	1584	1056	120	326	130...300	1409	611	537	56	617	260	350	276	33	150	58	12
	H2	10,5		1749	1775	1830	1830	1302		449													
	H3	14		1968	1994	2049	2049	1521		559													
CVAT50A	H1	8	6300	1646	1646	1646	1646	1065	125	326	130...300	1705	713	540	56	620	280	465	294	43	190	70	12
	H2	12		1846	1846	1846	1846	1265		426													
	H3	16		2046	2046	2046	2046	1465		526													
	H4	20		2246	2246	2246	2246	1665		626													
CVAT50	H1	9	8000	1846	1846	1846	1846	1265	159	393	130...300	1705	713	540	71	825	280	465	294	43	190	70	14
	H2	12,5		2046	2046	2046	2046	1465		493													
	H3	16		2246	2246	2246	2246	1665		593													

* - Ausführung mit einer Vorrichtung 'B' / Executions with reduction gear "B":