



VCSVAT 2x1

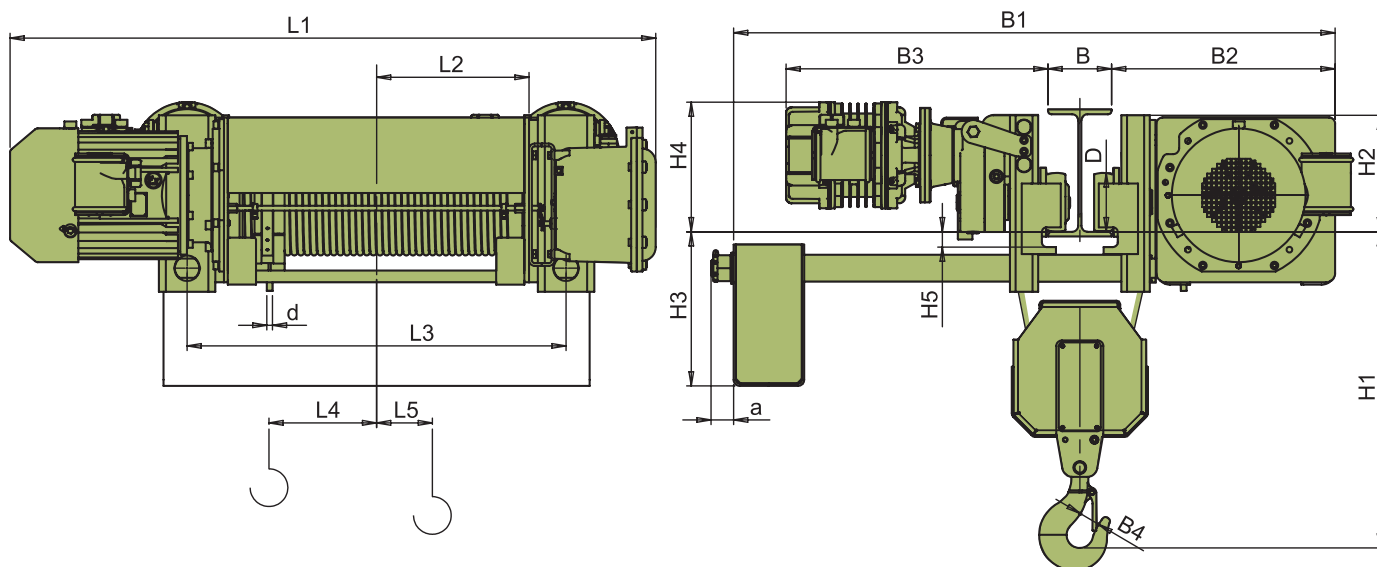

a=2/1			Говароподеиност Грузоподъемность [kg]	Размери / Размеры [mm]																				
TYP / TYPE	Hubhöhe Lifting height [m]	Hubgeschwindigkeit Lifting speed [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1*	H2	H3	H4	H5	D	a	d		
		8		12	8/2																		12/2	
		L1																						
VCVAT10	H1	6,5	1 000	954	954	1098	1098	186	484	78	48	110...300	1021	369	504	34	510	245	300	250	30	100	48	8
	H2	9		1064	1064	1208	1208	241	594	133														
	H3	12		1174	1174	1318	1318	296	704	188														
	H4	18		1394	1394	1538	1538	406	924	298														
	H5	24		1614	1614	1758	1758	516	1144	408														
VCVAT20	H1	8,5	2 000	1132	1132	1210	1210	219	595	82	54	120...300	1278	475	554	40	600	247,5	327,5	275,5	33	125	48	10
	H2	11,5		1232	1232	1310	1310	269	695	132														
	H3	15		1342	1342	1420	1420	324	805	187														
	H4	22		1562	1562	1640	1640	434	1025	297														
	H5	29		1782	1782	1860	1860	544	1245	407														
VCVAT30	H1	7,5	3 200	1162	-	-	-	219	595	82	54	120...300	1278	475	554	45	675	247,5	327,5	275,5	33	125	48	12
	H2	10		1262	-	-	-	269	695	132														
	H3	13		1372	-	-	-	324	805	187														
	H4	19		1592	-	-	-	434	1025	297														
	H5	25		1812	-	-	-	544	1245	407														
VCVAT40	H1	6,5	5 000	1255	1255	1316	1316	219	623	89	48	130...300	1409	611	587	50	870	260	350	288	33	150	58	14
	H2	9,5		1350	1350	1411	1411	270	718	137														
	H3	12,5		1442	1442	1503	1503	312	810	183														
	H4	18,5		1688	1688	1749	1749	436	1056	306														
	H5	25,5		1934	1934	1995	1995	558	1302	429														
VCVAT50	H2	9	8 000	1540	1540	-	-	275	765	138	44	130...300	1705	713	592	71	1082	280	465	308	43	190	70	18
	H3	12		1640	1640	-	-	325	865	188														
	H4	18		1840	1840	-	-	425	1065	288														
	H5	24		2040	2040	-	-	525	1265	388														

a=2/1			Tragfähigkeit Capacity [kg]	Masse / Dimensions [mm]																				
TYP / TYPE	Hubhöhe Lifting height [m]			Hubgeschwindigkeit Lifting speed [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1	H2	H3	H4	H5	D	a	d
				5	8	5/1,2	8/1,2																	
				L1																				
VCVATB10	H1	6,5	1 000	954	954	1098	1098	186	484	78	48	110...300	1021	369	537	34	510	245	300	263	30	100	48	8
	H2	9		1064	1064	1208	1208	241	594	133														
	H3	12		1174	1174	1318	1318	296	704	188														
	H4	18		1394	1394	1538	1538	406	924	298														
	H5	24		1614	1614	1758	1758	516	1144	408														
VCVATB20	H1	8,5	2 000	1132	1132	1210	1210	219	595	82	54	120...300	1278	475	554	40	600	247,5	327,5	275,5	33	125	48	10
	H2	11,5		1232	1232	1310	1310	269	695	132														
	H3	15		1342	1342	1420	1420	324	805	187														
	H4	22		1562	1562	1640	1640	434	1025	297														
	H5	29		1782	1782	1860	1860	544	1245	407														
VCVATB30	H1	7,5	3 200	1162	-	1210	1210	219	595	82	54	120...300	1278	475	554	45	675	247,5	327,5	275,5	33	125	48	12
	H2	10		1262	-	1310	1310	269	695	132														
	H3	13		1372	-	1420	1420	324	805	187														
	H4	19		1592	-	1640	1640	434	1025	297														
	H5	25		1812	-	1860	1860	544	1245	407														

VCVAT 4x1

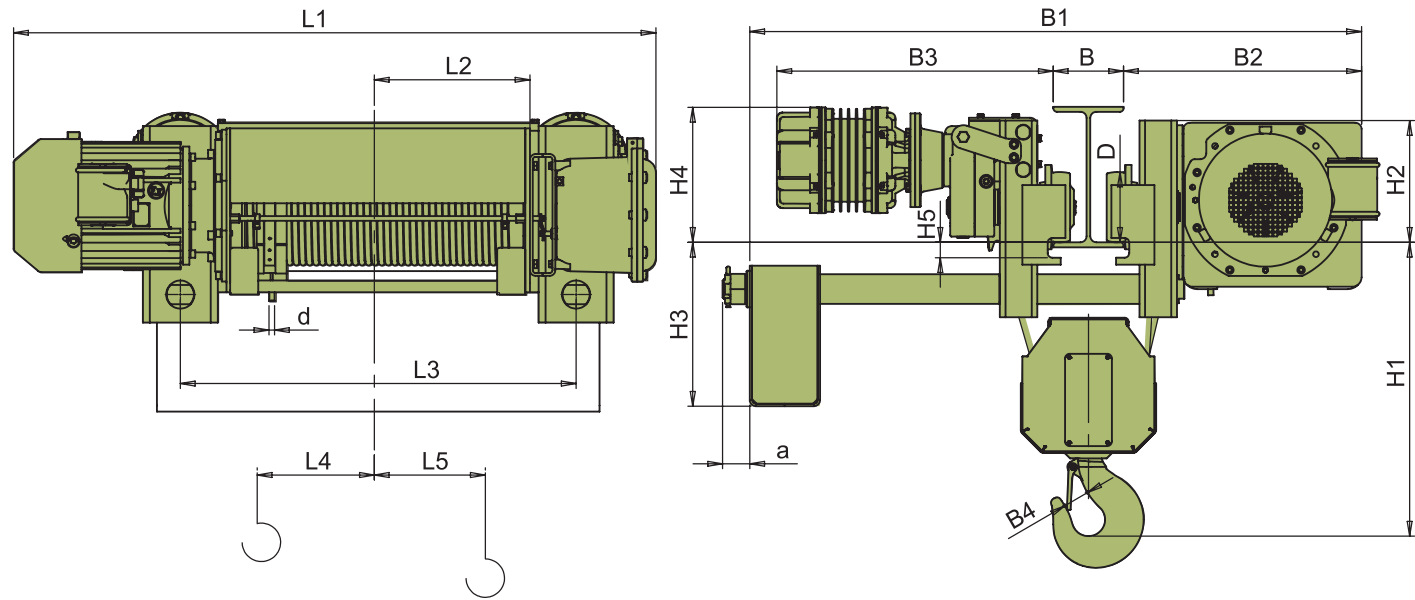



a = 4/1			Товароподъемность Грузоподъемность [kg]	Размеры / Размеры [mm]																				
TYP / TYPE	Hubhöhe Lifting height [m]			Hubgeschwindigkeit Lifting speed [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1*	H2	H3	H4	H5	D	a	d
				4	6	4/1	6/1																	
				L1																				
VCVAT10	H1	6	2 000	1174	1174	1318	1318	296	744	123	-5	130...300	1196	393	554	45	501	247,5	277,5	242,5	32,5	125	48	8
	H2	9		1394	1394	1538	1538	406	964	233	-60													
	H3	12		1614	1614	1758	1758	516	1184	343	-80													
VCVAT20	H1	7,5	4 000	1342	1342	1420	1420	324	845	139	-19	130...300	1306	508	587	50	580	260	350	288	33	150	58	10
	H2	11		1562	1562	1640	1640	434	1065	249	-74													
	H3	14,5		1782	1782	1860	1860	544	1285	359	-129													
VCVAT30	H1	6,5	6 300	1372	-	-	-	324	845	84	38	130...300	1306	508	587	56	635	260	350	288	33	150	58	12
	H2	9,5		1592	-	-	-	434	1065	194	-18													
	H3	12,5		1812	-	-	-	544	1285	304	-72													
VCVAT40	H1	6	10 000	1442	1442	1503	1503	312	850	70	45	130...300	1513	620	592	71	850	280	380	308	43	190	70	14
	H2	9		1688	1688	1749	1749	435	1096	193	-16													
	H3	12,5		1934	1934	1995	1995	558	1342	316	-78													
VCVAT50	H1	6	16 000	1640	1640	-	-	330	865	8	109	170...300	1705	713	625	90	1030	425	435	434,5	55	250	70	18
	H2	9		1840	1840	-	-	430	1065	108	58													
	H3	12		2040	2040	-	-	530	1265	208	8													

a = 4/1			Tragfähigkeit Capacity [kg]	Masse / Dimensions [mm]																				
TYP / TYPE	Hubhöhe Lifting height [m]	Hubgeschwindigkeit Lifting speed [m/min]				L2	L3	L4	L5	B	B1	B2	B3	B4	H1	H2	H3	H4	H5	D	a	d		
		2,5		4	2,5/0,6																		4/0,6	
		L1																						
VCVATB10	H1	6	2 000	1174	1174	1318	1318	296	744	123	-5	130...300	1196	393	554	45	501	247,5	277,5	242,5	32,5	125	48	8
	H2	9		1394	1394	1538	1538	406	964	233	-60													
	H3	12		1614	1614	1758	1758	516	1184	343	-80													
VCVATB20	H1	7,5	4 000	1342	1342	1420	1420	324	845	139	-19	130...300	1306	508	587	50	580	260	350	288	33	150	58	10
	H2	11		1562	1562	1640	1640	434	1065	249	-74													
	H3	14,5		1782	1782	1860	1860	544	1285	359	-129													
VCVATB30	H1	6,5	6 300	1372	-	1420	1420	324	845	84	38	130...300	1306	508	587	56	635	260	350	288	33	150	58	12
	H2	9,5		1592	-	1640	1640	434	1065	194	-18													
	H3	12,5		1812	-	1860	1860	544	1285	304	-72													